




OPRAWY LED / LED FIXTURES

LED NEXTRACK




NT3 | nexus
PRO LIGHT 
CZARNY / BLACK



- zasilanie: 230V AC (poprzez adapter na szynę 3-fazową),
- kompatybilność z szynoprzewodami Global Trac, Unipro, itp.
- dostępne kąty rozsyłu światła: 15°, 25°, 35°, 45°, 60°,
- nie można wymieniać lamp w oprawie.

- power: 230V AC (through the adaptor for 3-phase track),
- compatible with Global Trac, Unipro, etc.
- beam angles in our offer: 15°, 25°, 35°, 45°, 60°,
- lamps are unchangeable.

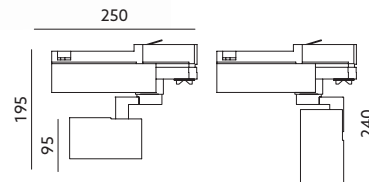

| MODEL | POBÓR MOCY [W] | TEMPERATURA BARWOWA [K] | WSPÓŁCZYNNIK ODDAWANIA BARW | STRUMIEN ŚWIETLNY LED [lm] | STRUMIEN ŚWIETLNY OPRAWY [lm] | ZASTOSOWANA DIODA LED | WAGA NETTO [kg] | PAKOWANIE [szt.] |
|------------------|----------------|-------------------------|-----------------------------|----------------------------|-----------------------------------|-----------------------|-----------------|------------------|
| MODEL | POWER [W] | COLOR TEMPERATURE [K] | COLOR RENDERING INDEX | LUMINOUS FLUX OF LED [lm] | LUMINOUS FLUX OF THE FIXTURE [lm] | APPLIED LIGHT SOURCE | NET WEIGHT [kg] | PACKING [pcs.] |
| LED NEXTRACK NT3 | 35 | 3000 | RA _≥ 90 | 3900 | 2800 | CITIZEN CLU038 | 1,07 | 8 |
| LED NEXTRACK NT3 | 35 | 3200 | RA _≥ 95 | 2950 | 2200 | CITIZEN VIVID | 1,07 | 8 |
| LED NEXTRACK NT3 | 35 | 3400 | RA _≥ 95 | 2950 | 2200 | CITIZEN VIVID | 1,07 | 8 |
| LED NEXTRACK NT3 | 35 | 4000 | RA _≥ 90 | 3900 | 2800 | CITIZEN CLU038 | 1,07 | 8 |

